


Girder Clamps

Model F – Beam Grab Specifications

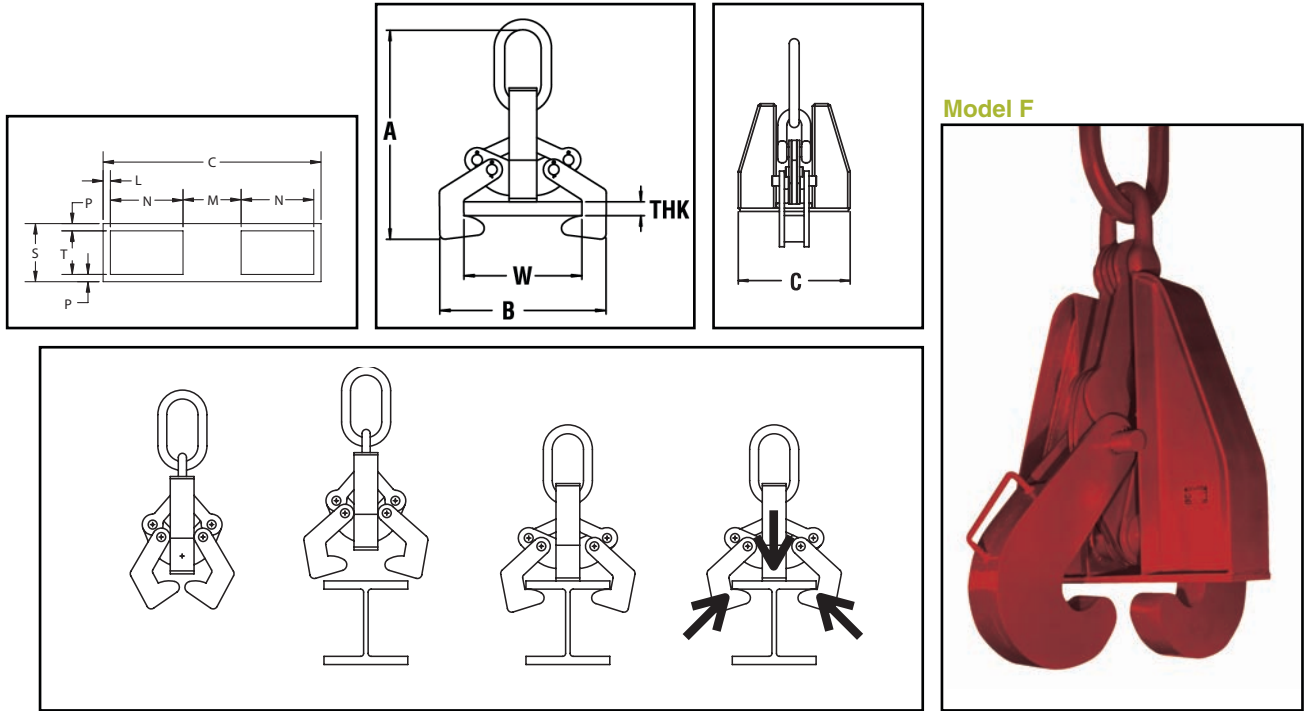

Model F


Specifications														
Model Number	Rated Capacity (tons)	Dimensions (inches)											Weight (lbs.)	
		A	B	C	Flange Width (w)	Flange Thickness (THK)		S	N	T	M	L		P
						Min.	Max.							
F-5	5	22.70	15.70	11.60	4	.25	.25	3	3	2	4.60	.50	.50	68
					5	.25	.38							
					6 - 10	.25	1							
F-15	15	30.10	25.10	17	7	.50	.75	4	4	2.50	7.30	.90	.80	187
					8	.50	1							
					9	.50	1.25							
					10	.50	1.25							
					11 - 17	.25	2							
F-25	25	44.80	45.20	24.30	16 - 17	1.25	3	5.50	6	4	9.80	1.30	.80	594
					18 - 24	1	3							
F-35	35	52.90	61.60	28.50	16 - 18	2.25	4	6	9.30	4.50	8.50	.80	.80	833
					20 - 22	2	4							
					24	1.75	4							
					26	1.75	4							
					28 - 36	1	4							

Green shading reflects rental inventory.



Girder Clamps

Model F – Beam Grab Specifications

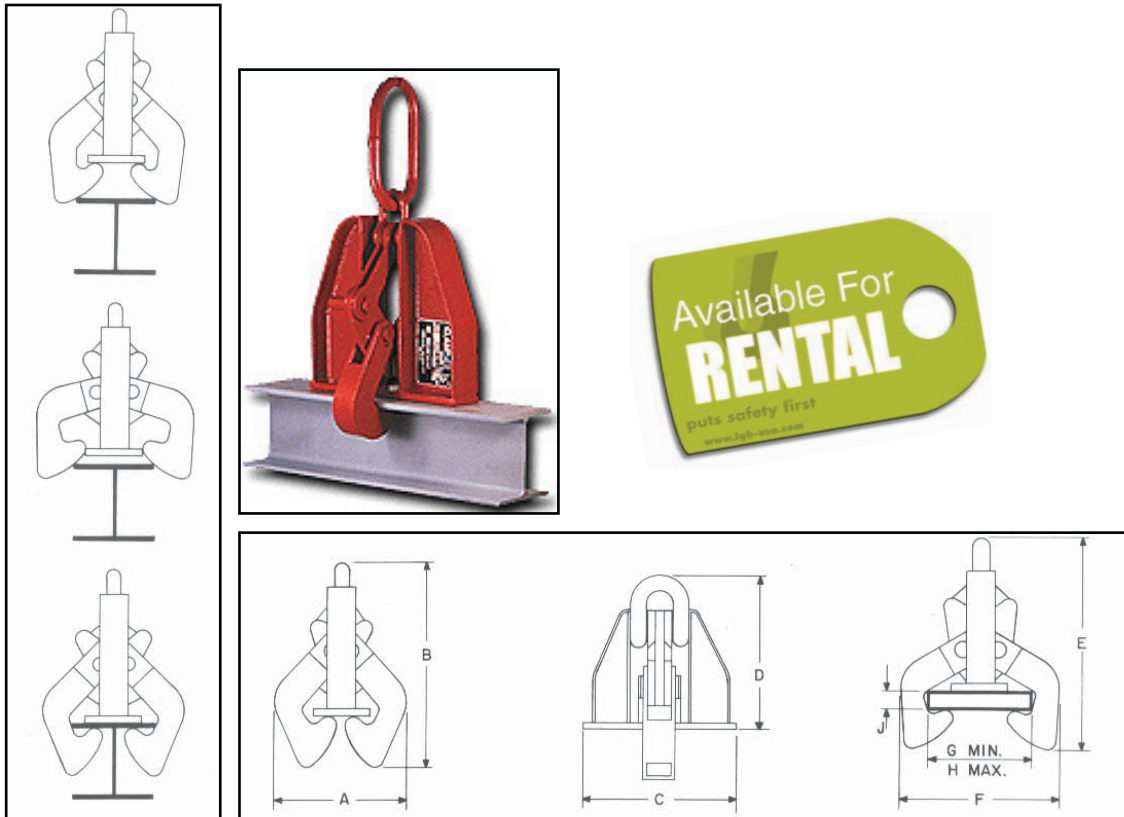

Specifications

Model	Working Load Limit (tons)	Flange Grip		Weight (lbs.)	Dimensions								
		Width Range Min. Max.	Depth		A	B	C	D	E	F	G	H	J
F-5	5	4 to 10	1	51	9½	26	12	20	25½	16¾	4	10	1
F-15	15	7 to 17	2	125	15½	34	17	27	34½	25	7	17	2
NS-15	15	7 to 17	2	120	15½	34	17	27	34½	25	7	17	2
F-25	25	16 to 24	3	244	23	48	22¼	36	53	37¼	16	24	3
NS-25	25	16 to 24	3	234	23	48	22¼	36	53	37¼	16	24	3
F-35	35	16 to 36	4	495	30	64	27½	48	58	53	16	36	4
NS-35	35	16 to 36	4	484	30	64	27½	48	58	53	16	36	4

Green shading reflects rental inventory.

NS Base Dimensions (inches)

Model	S	C	N	T	M	L	P
NS-15	4	16½	4½	2½	6½	½	¾
NS-25	5½	22¼	6½	4	7¼	¾	¾
NS-35	6	27½	8½	4½	9	¾	¾

Green shading reflects rental inventory.