



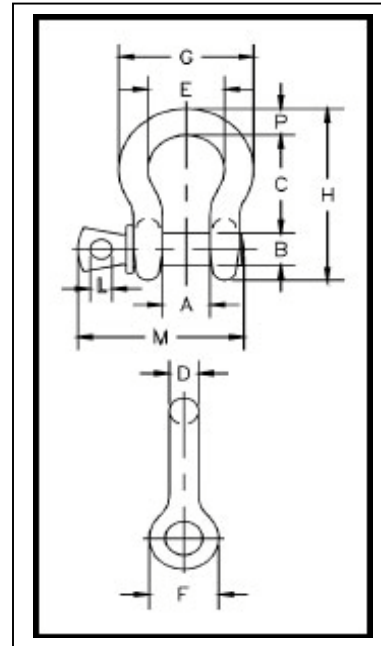

LIFTING GEAR HIRE CORPORATION
PHONE: 800-878-7305 FAX: 708-430-3536
SCREW PIN ANCHOR SHACKLES
CROSBY

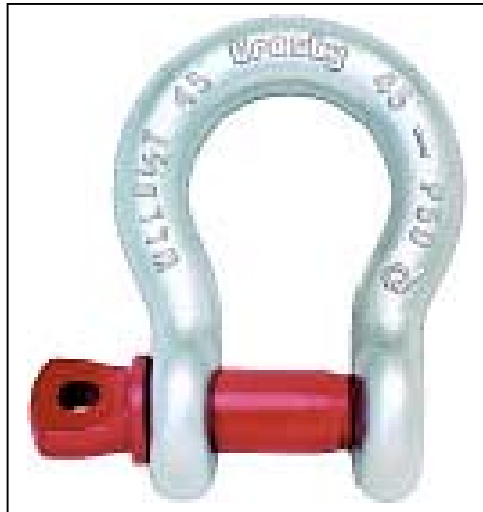

| Nominal Size (in.) | Working Load Limit * (tons) | Dimensions (in.) | | | | | | | | | | | | Tolerance +/- | |
|--------------------|-----------------------------|------------------|------|-------|------|------|------|-------|-------|------|-------|------|------|---------------|-----|
| | | A | B | C | D | E | F | G | H | L | M | N | P | C | A |
| 3/16 | 1/3 | .38 | .25 | .88 | .19 | .60 | .56 | .98 | 1.47 | .16 | 1.12 | — | .19 | .06 | .06 |
| 1/4 | 1/2 | .47 | .31 | 1.13 | .25 | .78 | .61 | 1.28 | 1.84 | .19 | 1.38 | 1.34 | .25 | .06 | .06 |
| 5/16 | 3/4 | .53 | .38 | 1.22 | .31 | .84 | .75 | 1.47 | 2.09 | .22 | 1.66 | 1.59 | .31 | .06 | .06 |
| 3/8 | 1 | .66 | .44 | 1.44 | .38 | 1.03 | .91 | 1.78 | 2.49 | .25 | 2.03 | 1.86 | .38 | .13 | .06 |
| 7/16 | 1 1/2 | .75 | .50 | 1.69 | .44 | 1.16 | 1.06 | 2.03 | 2.91 | .31 | 2.38 | 2.13 | .44 | .13 | .06 |
| 1/2 | 2 | .81 | .63 | 1.88 | .50 | 1.31 | 1.19 | 2.31 | 3.28 | .38 | 2.69 | 2.38 | .50 | .13 | .06 |
| 5/8 | 3 1/4 | 1.06 | .75 | 2.38 | .63 | 1.69 | 1.50 | 2.94 | 4.19 | .44 | 3.34 | 2.91 | .69 | .13 | .06 |
| 3/4 | 4 3/4 | 1.25 | .88 | 2.81 | .75 | 2.00 | 1.81 | 3.50 | 4.97 | .50 | 3.97 | 3.44 | .81 | .25 | .06 |
| 7/8 | 6 1/2 | 1.44 | 1.00 | 3.31 | .88 | 2.28 | 2.09 | 4.03 | 5.83 | .50 | 4.50 | 3.81 | .97 | .25 | .06 |
| 1 | 8 1/2 | 1.69 | 1.13 | 3.75 | 1.00 | 2.69 | 2.38 | 4.69 | 6.56 | .56 | 5.07 | 4.53 | 1.06 | .25 | .06 |
| 1 1/8 | 9 1/2 | 1.81 | 1.25 | 4.25 | 1.16 | 2.91 | 2.69 | 5.16 | 7.47 | .63 | 5.59 | 5.13 | 1.25 | .25 | .06 |
| 1 1/4 | 12 | 2.03 | 1.38 | 4.69 | 1.29 | 3.25 | 3.00 | 5.75 | 8.25 | .69 | 6.16 | 5.50 | 1.38 | .25 | .06 |
| 1 3/8 | 13 1/2 | 2.25 | 1.50 | 5.25 | 1.42 | 3.63 | 3.31 | 6.38 | 9.16 | .75 | 6.84 | 6.13 | 1.50 | .25 | .13 |
| 1 1/2 | 17 | 2.38 | 1.63 | 5.75 | 1.54 | 3.88 | 3.63 | 6.88 | 10.00 | .81 | 7.35 | 6.50 | 1.62 | .25 | .13 |
| 1 3/4 | 25 | 2.88 | 2.00 | 7.00 | 1.84 | 5.00 | 4.19 | 8.86 | 12.34 | 1.00 | 9.08 | 7.75 | 2.25 | .25 | .13 |
| 2 | 35 | 3.25 | 2.25 | 7.75 | 2.08 | 5.75 | 4.81 | 9.97 | 13.68 | 1.22 | 10.34 | 8.75 | 2.40 | .25 | .13 |
| 2 1/2 | 55 | 4.13 | 2.75 | 10.50 | 2.71 | 7.25 | 5.69 | 12.87 | 17.84 | 1.38 | 13.00 | — | 3.13 | .25 | .25 |